



pointpod

Point Pod Connect Specifications



**Point Pod Connect
Silver PPCV815**

Colour: Anodised Aluminium

Sockets: White with white surrounds

Material: Polyamide and ABS

**Warranty: 2 Years on all parts and
labour**



**Point Pod Connect
Black PPCV815B**

Colour: Anodised Black Aluminium

Sockets: Black with black surrounds

Material: Polyamide and ABS

**Warranty: 2 Years on all parts and
labour**

Dimensions

Hole Size: 101.6mm or 4" Diameter

Weight: 3kg or 6.6 Pounds

**Space Required In Cabinet : 450mm depth(17.72 inches), 160mm (6.3 inches) in diameter at the
mounting flange**

Socket Configuration: 2 x North American outlets, 1 x 3.0a USB -A, & 2 x 3.0a USB-C

Electrical Data

Supply Voltage: 125ac 60Hz

Max Current: 15a or 1875W



pointpod

4" or 102mm Diameter Hole


Total Load connect not to exceed rating

For indoor use only

ETL Listed, UL 962A & CSA C22.2

US Patent # US 10 777 985 B2

IP rating - IP44

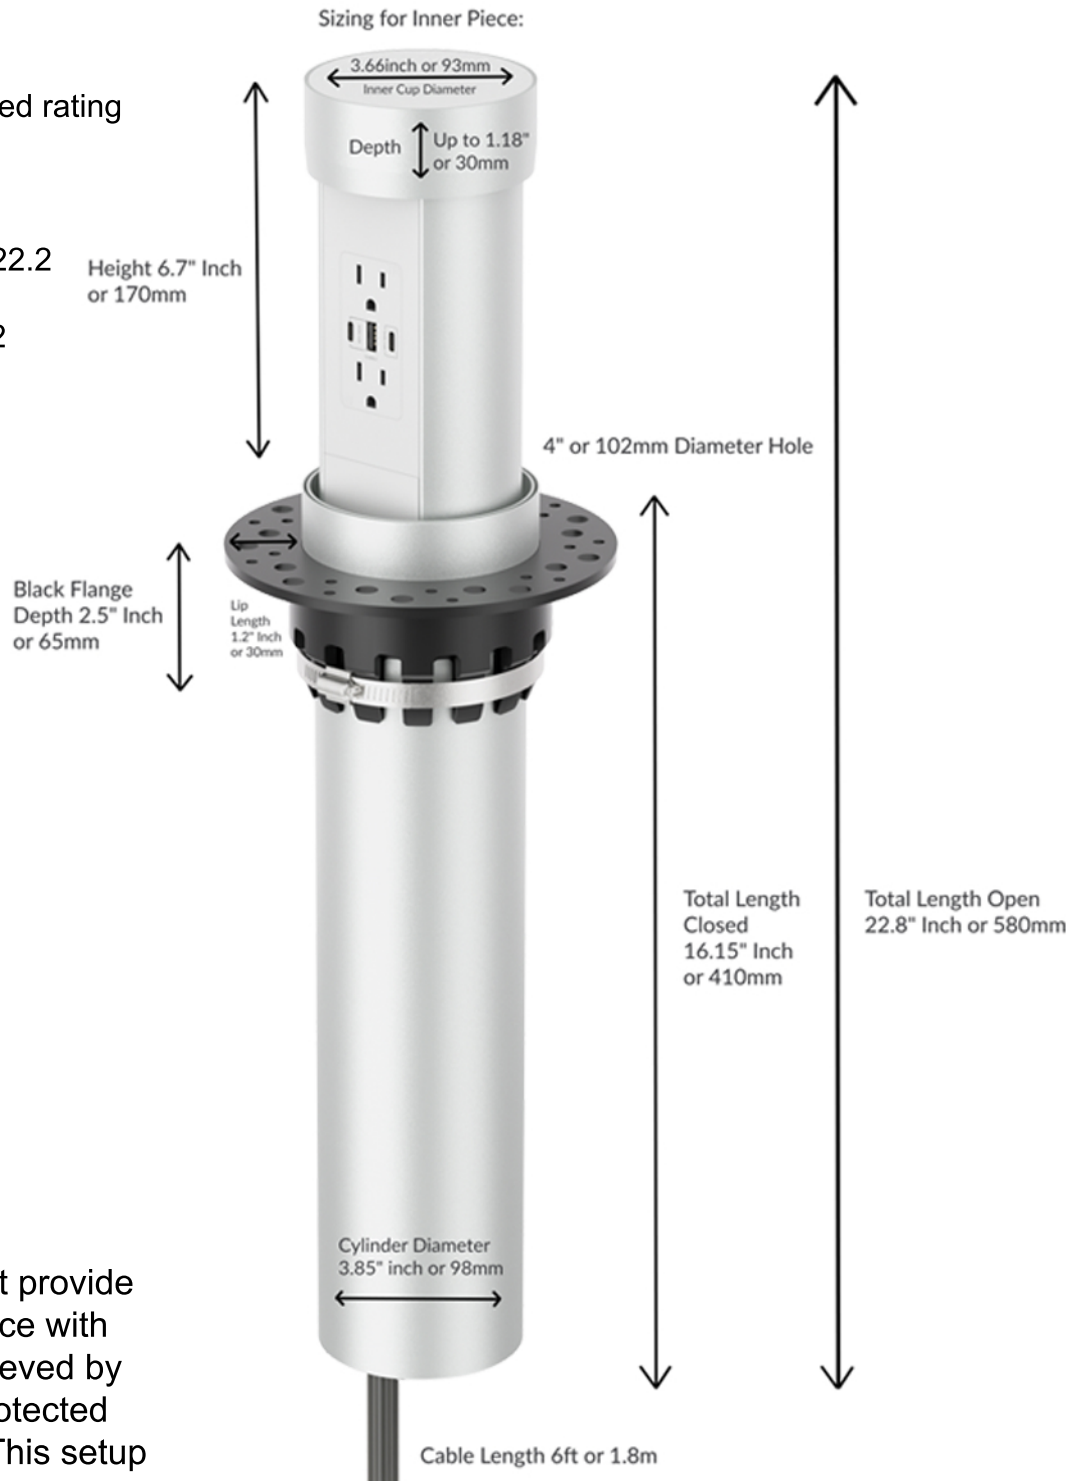

GFCI Protection:

While the unit itself doesn't provide GFCI protection, compliance with NEC 406.5(E) can be achieved by connecting it to a GFCI-protected circuit during installation. This setup ensures necessary protection against ground faults.

By adhering to these standards and installation practices, the Point Pod Connect meets the requirements set forth in NEC 406.5(E) for countertop receptacles.

Designed and
engineered in Australia

Made in Vietnam